Toyota Reach Trucks

The BT Reflex Range





BT Reflex B-series


REACH TRUCKS FOR STRAIGHTFORWARD APPLICATIONS

BT Reflex R-series

HIGH-PERFORMANCE REACH TRUCKS

BT Reflex E-series

UNIQUE TILTING CAB FOR ULTIMATE PERFORMANCE

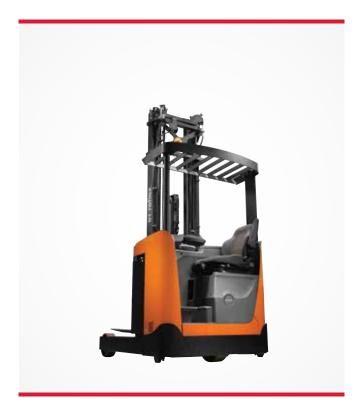

Simple, effective trucks for straightforward applications

1.2 – 1.6 tonnes load capacities

Lift heights up to 8.5 m



Advanced trucks – exceptional when working at height

1.4 – 2.5 tonnes load capacities

Lift heights up to 13 m



Unique tilting cab maximises productivity, driveability and safety

1.4 – 2.5 tonnes load capacities

Lift heights up to 13 m

P.4-7 P.8-11 P.12-15

BT Reflex N-series

NARROW-WIDTH REACH TRUCKS

BT Reflex O-series

REACH TRUCKS FOR INDOOR / OUTDOOR USE

BT Reflex F-series

4-WAY / LONG LOAD REACH TRUCKS



Designed to fit in confined areas, for block stacking and specialised racking

1.2 – 1.6 tonnes load capacities

Lift heights up to 8.5 m



Offers smooth performance indoors and outdoors on rough surfaces

1.6 tonnes load capacity

Lift heights up to 7.5 m



Multidirectional reach truck for long load handling

2.7 tonnes load capacity

Lift heights up to 8 m



B-SERIES

Some reach truck applications require a straightforward approach a truck that is simply effective. The BT Reflex B-series is unique, because it has been developed specifically for this type of operation an easy-to-use, practical solution particularly suited to drivers that have many tasks to deal with during their working day.

SPECIFICATIONS


Load capacity: 1.2, 1.4, 1.6 t @ 600 mm load centre

Maximum lift height: 8.5 m

Maximum travel speed: 10 km/h

Maximum battery capacity: 600 Ah

Option available: LSite

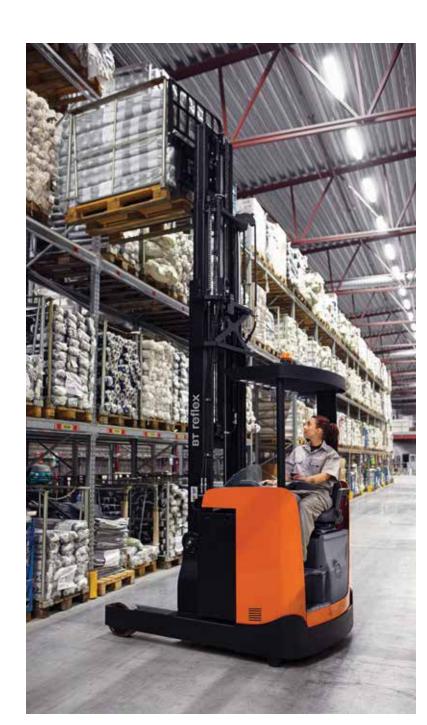







Fingertip controls



Cab designed around the driver (shows optional 'comfort' seat)



Optional E-bar mount for all ancillary equipment

Truck features Adjustable width over forks Automatic parking brake Clear-view mast Clear-view overhead guard Electronic braking system Electronic regenerative brakes (motor) Electronic speed control
Automatic parking brake Clear-view mast Clear-view overhead guard Electronic braking system Electronic regenerative brakes (motor)
Clear-view mast Clear-view overhead guard Electronic braking system Electronic regenerative brakes (motor)
Clear-view overhead guard Electronic braking system Electronic regenerative brakes (motor)
Electronic braking system Electronic regenerative brakes (motor) • • •
Electronic regenerative brakes (motor)
Flactronic speed control
Liectionic speed control
Electronic support arm brakes
Load support o o
Integrated sideshift • • • •
Tilting forks ● ●
Working lights

Control	- and	instruments
Controls	s anu	instruments

180° steering			0	0	0
360° progressive steering			•	•	•
Access Control (PIN codes)			•	•	•
Adjustable BT Control console			•	•	•
Automatic deceleration			•	•	•
Creep speed function			•	•	•
Drive motor temperature warning			•	•	•
E-bar			0	0	0
Electronic controller temperature warning			•	•	•
Electronic height indicator			0	0	0
Electronic fingertip controls			•	•	•
Emergency cut-off			•	•	•
Hour meter			•	•	•
Lift motor temperature warning			•	•	•
Mini-joystick electronic controls			•	•	•
Pedals as in a car			•	•	•
Power/Electronic steering			•	•	•
Split control panel			•	•	•
Steering direction indicator			•	•	•

• standard ° option	Safety	Durability	Productivity	Driveability	BT Reflex RRE120B	BT Reflex RRE140B	BT Reflex RRE160B
Operator features							
Adjustable backrest					•	•	•
Adjustable floor, 3 steps					•	•	•
Adjustable seat					•	•	•
Adjustable seat with safety belt					0	0	0
Adjustable steering wheel					•	•	•
Driver detection system					•	•	•
Driver-adapted programmable performance					•	•	•
Low step-in					•	•	•

Maintenance features

Easy access for maintenance		•	•	•
Fault diagnosis facility		•	•	•
Historic fault log		•	•	•

Battery management features

Battery change facility		0	0	0
Battery status indicator		•	•	•
Battery discharge prevention system		•	•	•
Sideways battery change		0	0	0

Special applications

Simple controls for easy operation

The controls on BT Reflex B-series trucks are as you expect: simple and logical, with fingertip control levers for all fork movements, and effortless electronic steering for precise driving. The steering system offers 360° flexibility, although conventional 180° steering is available as an option. PIN-code start-up ensures only authorised drivers can operate the truck.

Adjustable cab

The seat and controls are fully adjustable to suit the driver, and the cab floor height can also be adapted.

TPS-based reliability



R-SERIES

BT Reflex R-series trucks are high-performance machines with exceptional and unique features for working fast and productively at height without compromising safety for the driver and security for the load.

SPECIFICATIONS

Load capacity: 1.4, 1.6, 1.8, 2.0, 2.5 t @ 600 mm load centre

Maximum lift height: 13 m

Maximum travel speed: 14 km/h

Maximum battery capacity: 930 Ah

Options available: LSite LI-ION SUTOPLOY ** (1)







The cabin is ergonomically designed around the operator, allowing consistent productivity during a shift



The transparent roof provides a clear upward view to the forks when working at height.



The driver compartment is adjustable to suit different driver sizes. The floor height can be adapted manually or electronically.



Optional E-bar mount for all ancillary equipment

standard option

Adjustable fork width

Truck features

• standard • option	Safety	Durability	Productivity	Driveability (BT Reflex RRE140H	BT Reflex RRE160H	BT Reflex RRE180H	BT Reflex RRE200H	BT Reflex RRE250H
Controls and instruments									
Mini-joystick electronic controls					•	•	•	•	•
Multifunction control					0	0	0	0	0
Pedals as in a car					•	•	•	•	•
Power/Electronic steering					•	•	•	•	•
Smart Access (electronic card/fob)					0	0	0	0	0
Split control panel					•	•	•	•	•
Steering direction indicator					•	•	•	•	•
Weight indicator					0	0	0	0	0
Fork position laser					0	0	0	0	0

	•	•	•	•	•
	0	0	0	0	0
	•	•	•	•	•
	0	0	0	0	0
	•	•	•	•	•
	0	0	0	0	0
	•	•	•	•	•
	•	•	•	•	•
	0	0	0	0	0
	•	•	•	•	•
	•	•	•	•	•
	0	0	0	0	0

Maintenance features Easy access for maintenance Fault diagnosis facility Historic fault log

Battery management features							
Battery change facility			5	0	0	0	0
Battery discharge prevention system						•	
Battery status indicator		•	•	•	•	•	•
Sideways battery change			5	0	0	0	0

Special applications						
Coldstore version		0	0	0	0	0
Drive-in rack version		0	0	0	0	0
EEx version (ATEX)		0	0	0	0	0

Class-leading performance at height

The BT Reflex R-series trucks offer the highest residual capacities in class and this up to 13 m thanks to the superb stability of the truck. The reach movement is optimised according to lift height and load weight, increasing speed of load handling. The Transitional Lift Control system (TLC) ensures maximum load handling speeds can be maintained in operation thanks to shock-free lifting and lowering.

Totalview Concept

The clean mast and fork carriage design in combination with the transparent roof offer the driver an exceptional view on the load at all times, increasing productivity and safety.

The optional fork laser enhances this even further by helping to pick pallets faster and without damage.


Unique driver experience

The truck is fully adjustable to the driver: seat, floor, controls and steering console can all be adapted to any driver size. The patented and unique Transitional Lift Control system ensures completely smooth, shock-free lifting and lowering, even at maximum speed.

Li-ion battery technology

This maintenance-free battery technology offers 30% less energy consumption, exceptional battery life and the option for fast charging at any time, eliminating the need for battery change in multi-shift applications.

TPS-based reliability

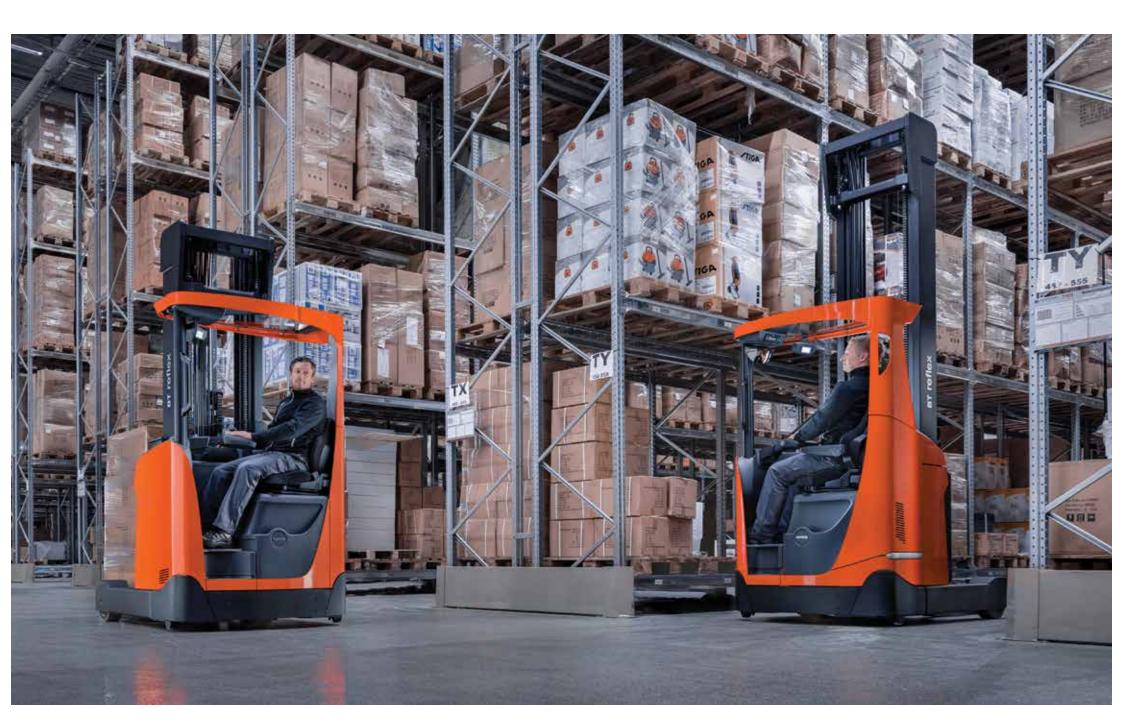

E-SERIES

The BT Reflex E-series is the world's only reach truck with tilting cabin and has been delivering superior high level handling performance since its launch. Repeat business from customers using tilt cab trucks prove to the advantages of the concept.

SPECIFICATIONS

Load capacity: 1.4, 1.6, 1.8, 2.0, 2.5 t @ 600 mm load centre

Maximum lift height: 13 m

Maximum travel speed: 14 km/h

Maximum battery capacity: 930 Ah

Options available: LSite LI-ION ** (1)









The open fork carriage with integrated side shift offers excellent visibility forward.



Easier positioning of the forks in front of pallets with the fork laser option reduces damage cost and keeps productivity high.




Lithium-ion batteries allow for opportunity charging and are 30% more energy-efficient than conventional batteries.

• standard ° option	Safety	Durability	Productivity	Driveability	BT Reflex RRE140HE	BT Reflex RRE160HE	BT Reflex RRE180HE	BT Reflex RRE200HE	BT Reflex RRE250HE
Truck features									
Adjustable fork width					•	•	•	•	•
Automatic deceleration					•	•	•	•	•
Automatic parking brake					•	•	•	•	•
Choice of chassis widths					0	0	0	0	0
Clear-view mast					•	•	•	•	•
Clear-view overhead guard					•	•	•	•	•
Transparent overhead guard					0	0	0	0	0
Electronic braking system					•	•	•	•	•
Electronic regenerative brakes (motor)					•	•	•	•	•
Electronic speed control					•	•	•	•	•
Electronic support arm brakes *					0	0	0	0	0
Enclosed, heated cab					0	0	0	0	0
High-capacity battery models					0	0	0	0	0
High performance models					0	0	0	0	0
Load support					0	0	0	0	0
Optimised Cornering Control (OTP)					•	•	•	•	•
Optimised Reach Control (OTP)					•	•	•	•	•
Optimised Speed Control when mast reached out (OTP)					•	•	•	•	•
Integrated sideshift					0	0	0	0	0
Fork spreader					0	0	0	0	0
Tilting forks					•	•	•	•	•
Working lights					0	0	0	0	0
Blue or Red Led Warning light					0	0	0	0	0

Controls and instruments

360° progressive steering			•	•	•	•	•
Access Control (PIN codes)			•	•	•	•	•
Adjustable Control console			•	•	•	•	•
Automatic 0-tilt			0	0	0	0	0
Camera/monitor system			0	0	0	0	0
Creep speed function			•	•	•	•	•
Drive motor temperature warning			•	•	•	•	•
E-bar			•	•	•	•	•
Electronic controller temperature warning			•	•	•	•	•
Electronic height indicator			0	0	0	0	0
Emergency cut-off			•	•	•	•	•
Height pre-selector			0	0	0	0	0
Lift motor temperature warning			•	•	•	•	•
Load information display			0	0	0	0	0
Mini-joystick electronic controls			•	•	•	•	•

^{*}standard on RRE180-250



Operator features

Adjustable seat		•	•	•	•	•
Adjustable seat with safety belt		0	0	0	0	0
Adjustable steering wheel		•	•	•	•	•
Armrest		0	0	0	0	0
Manually adjustable floor		•	•	•	•	•
Electrically adjustable floor		0	0	0	0	0
Driver detection system		•	•	•	•	•
Driver-adapted programmable performance		•	•	•	•	•
Heated seat		0	0	0	0	0
Low step-in		•	•	•	•	•
Storage compartments		•	•	•	•	•
Tilting cab		•	•	•	•	•
Writing table		0	0	0	0	0
TTTT CASTE						

Maintenance features

Easy access for maintenance		•	•	•	•	•
Fault diagnosis facility		•	•	•	•	•
Historic fault log		•	•	•	•	•

Battery management features

Battery change facility					0	
Battery discharge prevention system		•	•	•	•	•
Battery status indicator		•	•	•	•	•
Sideways battery change		0	0	0	0	0

Special applications

- Production of Production of the Control of the Co							
Coldstore version			0	0	0	0	0
Drive-in rack version			0	0	0	0	0
EEx version (ATEX)			0	0	0	0	0

Class-leading performance at height

The BT Reflex E-series trucks offer the highest residual capacities in class and this up to 13 m thanks to the superb stability of the truck. The reach movement is optimised according to lift height and load weight increasing speed of load handling. The Transitional Lift Control system (TLC) ensures maximum load handling speeds can be maintained in operation thanks to shock-free lifting and lowering.

World's only tilting cab

The unique E-series with tilting cab is designed to reduce the risk of strain for the driver in repetitive high-level applications. Working at height is also enhanced by the improved visibility on the load.

Totalview Concept

The clean mast and fork carriage design in combination with the transparent roof offer the driver an exceptional view on the load at all times, increasing productivity and safety. The optional fork laser enhances this even further by helping to pick pallets faster without damage.

Unique driver experience

The truck is fully adjustable to the driver: seat, floor, controls and steering console can all be adapted to any driver size. The patented and unique Transitional Lift Control system ensures completely smooth, shock-free lifting and lowering, even at maximum speed.

Li-ion battery technology

This maintenance-free battery technology offers 30% less energy consumption, exceptional battery life and the option for fast charging at any time eliminating the need for battery change in multi-shift applications.



N-SERIES

Designed and built for applications requiring a narrow chassis width, such as block stacking or drive-in racking, or for work in tight situations. However the narrow chassis width is not at the expense of comfort. There is a spacious cab with fully adjustable seat and controls.

SPECIFICATIONS

Load capacity: 1.2, 1.4, 1.6t @ 600 mm load centre

Maximum lift height: 8.5 m

Maximum travel speed: 11 km/h

Maximum battery capacity: 600 Ah

Options available: LSite LI-ION ** (1)







The rear pillar window aids visibility and helps the driver to stay within the truck cab, for extra safety



BT Reflex N-series models feature 360° steering, for intuitive and responsive control



Electronic braking aids driveability



BT Access Control is standard, preventing unauthorised use

360° progressive steering			•
Access Control (PIN codes)			•
Adjustable BT Control console			(
Automatic deceleration			(
Creep speed function			•

Controls and instruments

Drive motor temperature warning

Steering direction indicator

		•	•	•
		0	0	0
		•	•	•
		0	0	0
		•	•	•
		•	•	•
		0	0	0
		•	•	•
		0	0	0
		•	•	•
		•	•	•
		0	0	0
		i		

• standard ° option	Safety	Durability	Productivity	Driveability	BT Reflex RRE120N	BT Reflex RRE140N	BT Reflex RRE160N
Operator features							
Adjustable pedals					•	•	•
Adjustable seat					•	•	•
Adjustable seat with safety belt					0	0	0
Adjustable steering wheel					•	•	•
Driver detection system					•	•	•
Driver-adapted programmable performance					•	•	•
E-bar					•	•	•
Heated seat					0	0	0
Low step-in					•	•	•
Storage compartments					•	•	•
Writing table					0	0	0

2 2 2

Maintenance features

Easy access for maintenance	•	•	•
Fault diagnosis facility	•	•	•
Historic fault log	•	•	•

Battery management features

Battery change facility			0	0	0
Battery discharge prevention system		-	•	•	•
Battery status indicator		-	•	•	•
Sideways battery change			0	0	0

Special applications


Coldstore version		0	0	0
Drive-in rack version		0	0	0
EEx version (ATEX)		0	0	0

Totalview Concept

The clean mast and fork carriage design in combination with the transparent roof offer the driver an exceptional view on the load at all times, increasing productivity and safety.

The optional fork laser enhances this even further by helping to pick pallets faster and without damage.

TPS-based reliability

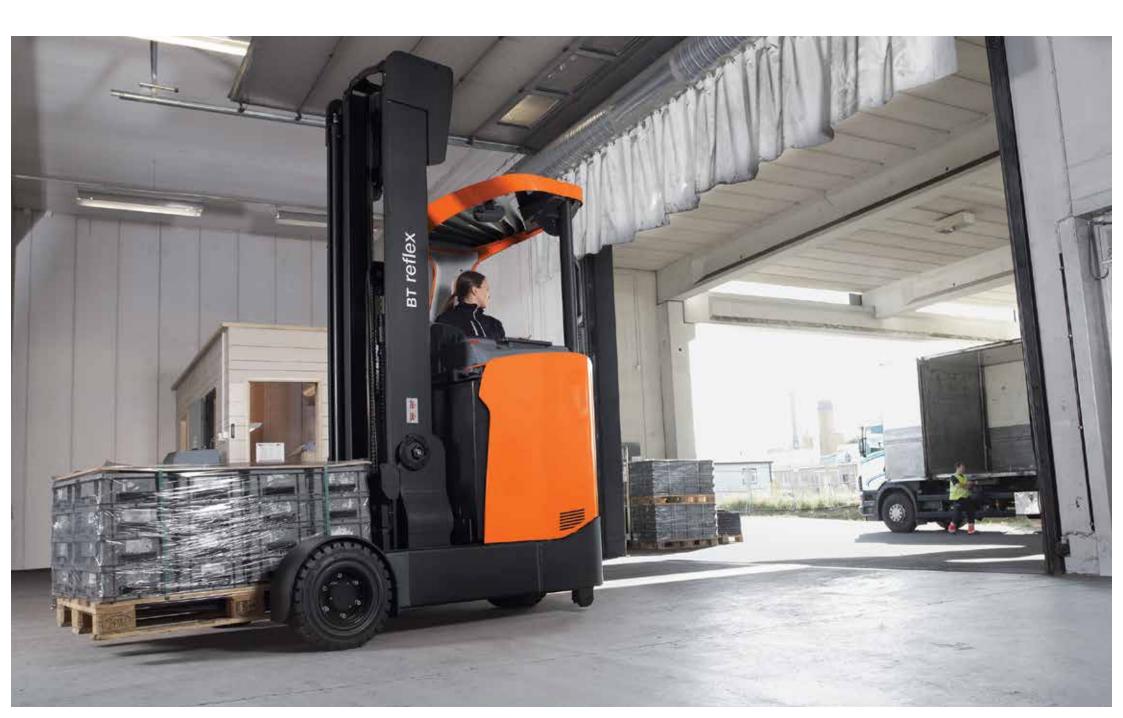

O-SERIES

With 145 mm ground clearance and super-elastic tyres for indoor and outdoor operation, BT Reflex O-series trucks are designed and built for complete versatility. For example, block stacking in yards, servicing outdoor racking and unloading curtain-side trailers.

SPECIFICATIONS

Load capacity: 1.6t @ 600 mm load centre

Maximum lift height: 7.5 m

Maximum travel speed: 11 km/h

Maximum battery capacity: 620 Ah

Options available: LSite











Superelastic tyres on all wheels and 145 mm ground clearance mean the BT Reflex O-series can handle outdoor surfaces, including gradients and transitions.



The adjustable mini-joystick console allows for accurate fingertip control

Access Control (PIN codes)		
Adjustable Control console		
Automatic 0-tilt		
Camera/monitor system		
Creep speed function		
Drive motor temperature warning		
E-bar		
Electronic controller temperature warning		
Electronic height indicator		
Emergency cut-off		
Height pre-selector		

Controls and instruments

360° progressive steering

Lift motor temperature warning Load information display Mini-joystick electronic controls

Pedals as in a car Power/Electronic steering Smart Access (electronic card/fob)

Split control panel
Steering direction indicator

Weight indicator Fork position laser

• standard • option	Safety	Durability	Productivity	Driveability	BT Reflex RRE160HR
Operator features					
Adjustable seat					•
Adjustable seat with safety belt					0
Adjustable steering wheel					•
Armrest					0
Manually adjustable floor					•
Electrically adjustable floor					0
Driver detection system					•
Driver-adapted programmable performance					•
Heated seat					0
Low step-in					•
Storage compartments					•
Writing table					0

Maintenance features

Easy access for maintenance	•
Fault diagnosis facility	•
Historic fault log	•

Battery management features

Battery change facility	0
Battery discharge prevention system	•
Battery status indicator	•
Sideways battery change	0

Special applications

EEx version (ATEX)		0	
Weather protection solutions		0	

Transitional Lift Control (TLC)

The patented and unique Transitional Lift Control system ensures completely smooth, shock-free lifting and lowering, even at maximum speed.

Totalview concept

The clean mast and fork carriage design in combination with the transparent roof offer the driver an exceptional view on the load at all times, increasing productivity and safety. The optional fork laser enhances this even further by helping to pick pallets faster and without damage.

All-weather protection


A choice of weather protection options ensures that the BT Reflex O-series can operate in all conditions: overhead and mast-direction windows; additional side windows; and a fully enclosed cab with door and fan heater/ventilation.

Unique driver experience

The truck is fully adjustable to the driver: seat, floor, controls and steering console can all be adapted to any driver size.

The patented and unique Transitional Lift Control system ensures completely smooth, shock-free lifting and lowering, even at maximum speed.

TPS-based reliability

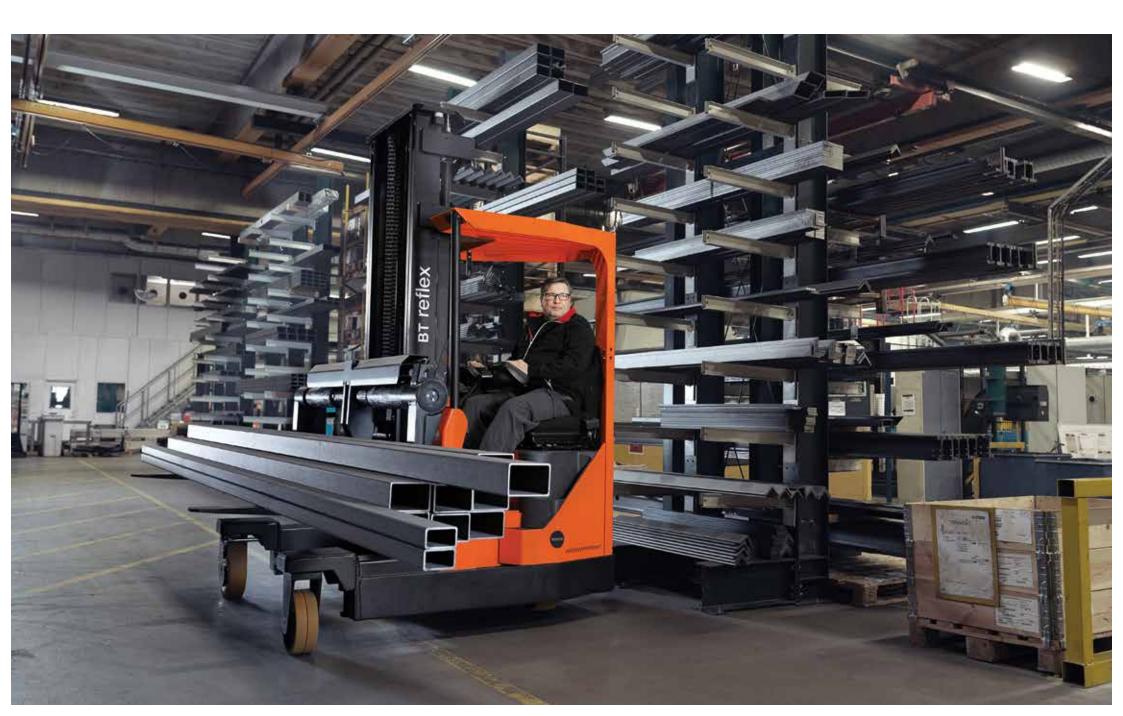

F-SERIES

The unique design of the BT Reflex F-series means that the driver faces in the direction of the forks to enjoy a clear view of the load being handled. In all other respects the BT Reflex F-series shares the same characteristics as the BT Reflex R-series.

SPECIFICATIONS

Load capacity: 2.7 t @ 600 mm load centre

Maximum lift height: 8 m

Maximum fork spread: 2.22 m

Maximum travel speed: 8 km/h

Maximum battery capacity: 750 Ah







BT Reflex F-series' hydraulic fork spreader quickly adapts the truck to loads of different dimensions



The operator faces the forks to obtain the best view of long and unusual loads

• standard • option	Safety	Durability	Productivity	Driveability	BT Reflex FRE270
Truck features					
Adjustable fork width					•
Automatic parking brake					•
Clear-view mast					•
Clear-view overhead guard					•
Electronic braking system					•
Electronic regenerative brakes (motor)					•
Electronic speed control					•
Fork spreader					•
Four-wheel design					•
Integrated sideshift					0
Tilting forks					•
Warning light					0
Working lights					0

Contro	ls and	instru	ments

Controls and instruments			
360° progressive steering			•
Adjustable BT Control console			•
Automatic deceleration			•
Drive motor temperature warning			•
Electronic controller temperature warning			•
Electronic fingertip controls			•
Electronic height indicator			0
Emergency cut-off			•
Height pre-selector			0
Hour meter			•
Lift motor temperature warning			•
Load information display			0
Mini-joystick electronic controls			•
Multifunction control			0
Pedals as in a car			•
Power/Electronic steering			•
Steering direction indicator			•
Twin direction controls			•
Weight indicator			•

• standard • option	Safety	Durability	Productivity	Driveability	BT Reflex FRE270
Operator features					
Adjustable pedals					•
Adjustable seat with safety belt					•
Adjustable steering wheel					•
Driver detection system					•
Driver facing forks					•
Driver-adapted programmable performance					•
Heated seat					0
Low step-in					•
Storage compartments					•
Writing table					0

Maintenance features

Easy access for maintenance			•
Fault diagnosis facility			•
Historic fault log			•

Battery management features

Battery change facility		0
Battery discharge prevention system		•
Battery status indicator		•
Sideways battery change		•

Maximum manoeuvrability

Electronic rotation of the leading steer wheel allows the truck to be driven forwards or sideways with the additional manoeuvrability provided by electronic 360° steering.

Handle non-palletised loads

Hydraulic fork spreading to over two metres allows safe handling of long and unusual loads, as well as conventional pallet/unit load handling.

Totalview concept

The design of the overhead guard provides a clear upward view to the forks when working at height. Furthermore the clear-view mast and fork carriage deliver a view to the load to ensure safe and accurate handling.

TPS-based reliability

Toyota Material Handling in Europe

Total coverage

The Toyota Material Handling network extends to over 30 countries in Europe with more than 4500 mobile technicians.

Always local – with global support Wherever you are located in Europe, we are always local, due to our extensive coverage, but with the stability and back-up of a worldwide organisation.

Made in Europe

Over 90% of trucks we sell are built in our own European factories, in Sweden, France and Italy – all to TPS quality standards. We employ over 3000 production staff in Europe and work with over 300 European suppliers.

Approximately 15% of our European production is exported to other parts of the world.



